



**AT30 Automatic Matching Network**

Rated Power AT30 (Nominal)	3000 Watts - Not to exceed 65 amps @ 6KV
Frequency (specify when ordering)	1.7 - 40.68 MHz
Cooling	Water - 5 GPH
RF Input Connector (model type & power dependant)	Type "N", "HN", 7/16 DIN Female
RF Output Connection (specify when ordering)	Stud, Strap, Hard Line, Compression
Control Connector	15 Pin Female D-Sub
Probe(s)	DC Standard, Optional: Peak RF, Current
Compliance, Safety	CE
Dimensions - (L,W,H)	13.13" x 13.38" x 6.00" (33.35 x 33.98 x 15.24 cm)
Weight	20 lbs., (9.07kg)
Control Cable, 12'	9100000144
DC Probe/Preset Cable, 2'	9100050024


Tuning Range, Generic Configuration

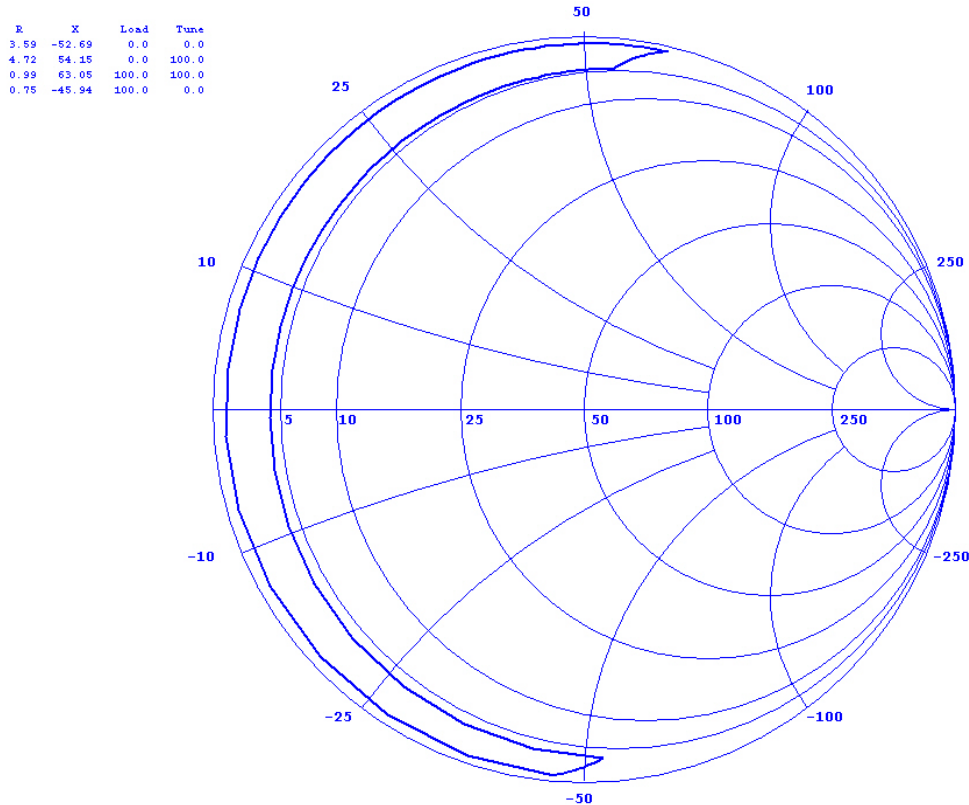


AT30 Physical Dimensions ( inch [mm] )

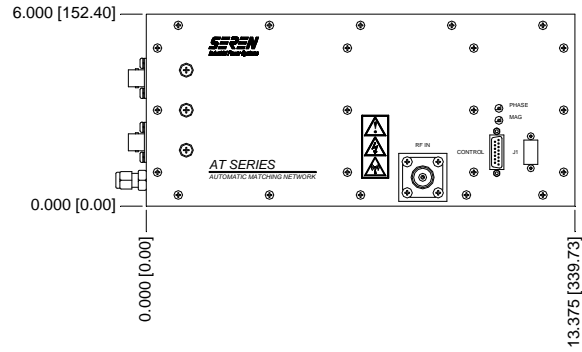

Side (Input) View

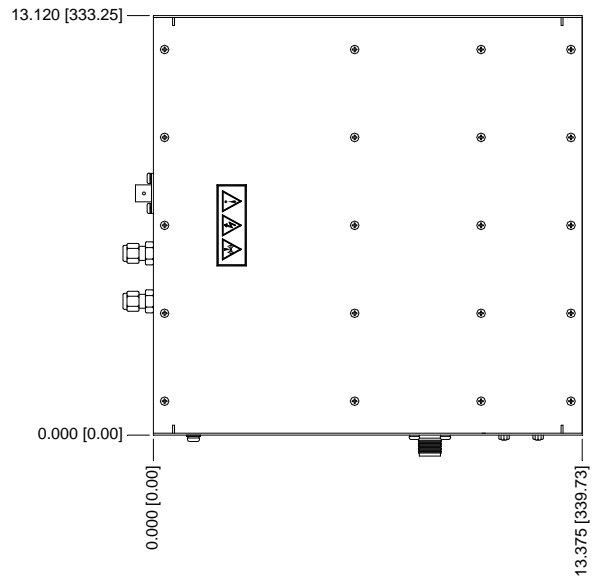

Top View

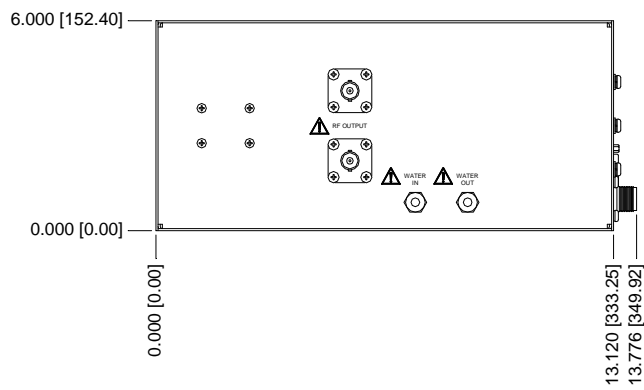

Rear (Output) View