



AT50/140 Automatic Matching Network

| | |
|---|---|
| Rated Power AT50/140 (Nominal) | 5000 Watts - Not to exceed 140 amps @ 6KV |
| Frequency | 13.56 MHz |
| Cooling | Water - 5 GPH |
| RF Input Connector (specify when ordering) | 1-5/8" EIA Flange, Type "LC" |
| RF Output Connection (specify when ordering) | Hard Line, Compression, Water Cooled |
| Control Connector | 15 Pin Female D-Sub |
| Probe(s) | DC Standard, Optional: Peak RF, Current |
| Compliance, Safety | CE |
| Dimensions - (L,W,H) | 17.00" x 16.13" x 9.50" (43.18 x 40.96 x 24.13cm) |
| Weight | 20 lbs., (10.43kg) |
| Control Cable, 12' | 9100000144 |
| DC Probe/Preset Cable, 2' | 9100050024 |


Tuning Range, Generic Configuration

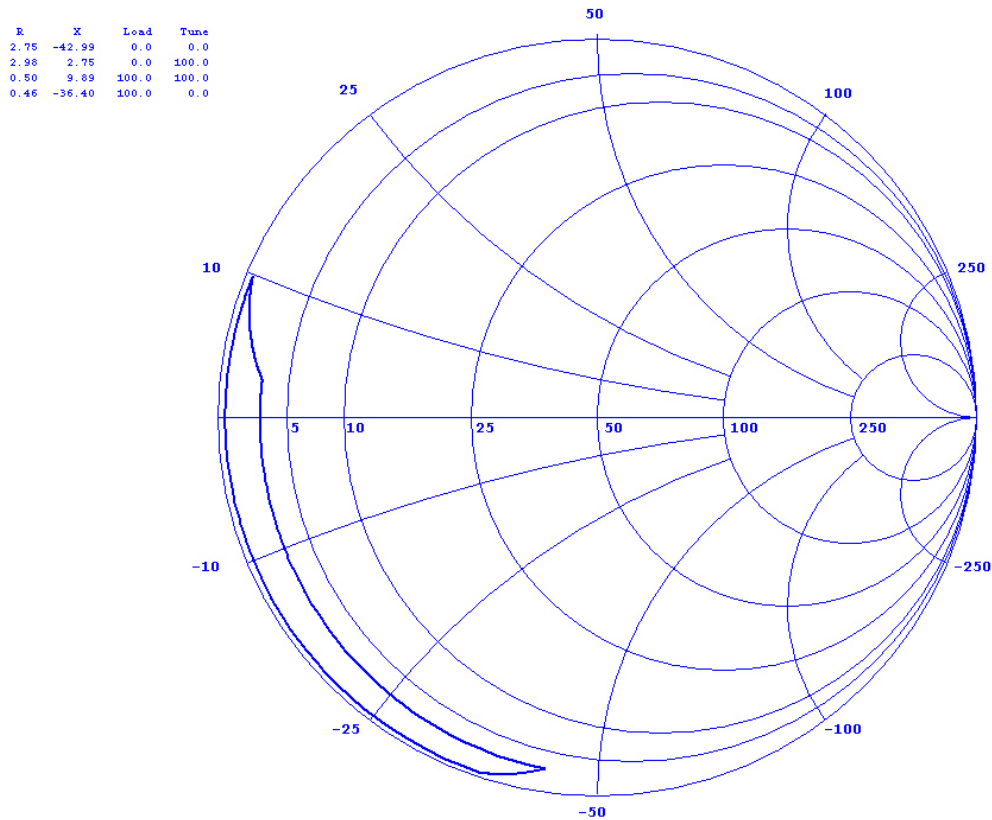


AT50/140 Physical Dimensions (inch [mm])

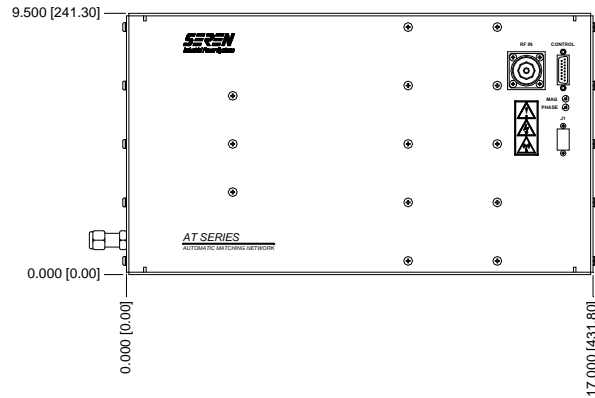

Side (Input) View

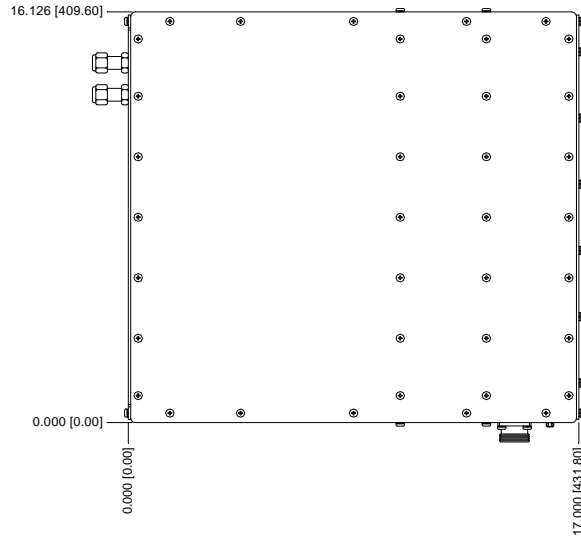

Top View

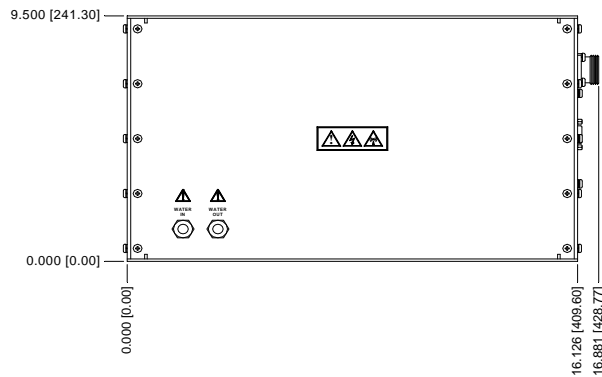

Rear View