


ATS10M "Mini" Automatic Matching Network

Rated RF Power ATS10M (Nominal)	1000 Watts - Not to exceed 65 amps @ 6KV
Frequency	13.56, 27.12, 40.68 MHz
Cooling	Air
RF Input Connector (specify when ordering)	Type "N" or "HN"
RF Output connection (specify when ordering)	RF Connector, Stud, Strap, Hard Line, Compression
DC Input Power	24 VDC @ 3 Amps
DC Power Input Connector	9 Pin Male D-Sub
I/O Serial Connector (Combo RS-232, RS-485, RS-422)	9 Pin Female D-Sub
I/O Analog Connector	25 Pin Female D-Sub
Compliance, Safety	CE, NRTL (US)
Dimensions - (L,W,H)	8.00" x 13.00" x 4.00" (20.32 x 33.02 x 10.6 cm)
Weight	10 lbs., (4.53kg)

Tuning Range, Generic Configuration

R	X	Load	Tune
24.59	-86.79	0.0	0.0
30.70	40.57	0.0	100.0
1.04	53.53	100.0	100.0
0.63	-68.51	100.0	0.0

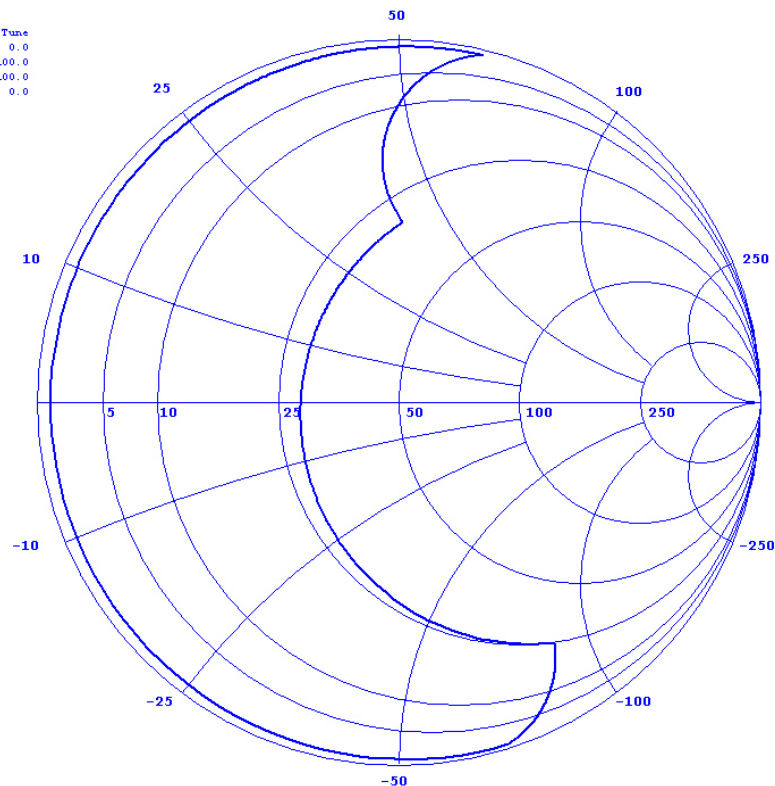

ATS10M Physical Dimensions (inch [mm])

