


**ATS3 Automatic Matching Network**

Rated RF Power (Nominal)	300 Watts - Not to exceed 20 Amps @ 2.5KV
Frequency (specify when ordering)	1.7 MHz to 60 MHz
Cooling	Air or Water - Load Dependent
RF Input Connector	Type "N" Female
RF Output Connection (Specify when ordering)	RF Connector, Stud, Strap, Compression
DC Input Power	24 VDC @ 3 Amps
DC Power Input Connector	9 Pin Male D-Sub
I/O Serial Connector (Combo RS-232, RS-485, Rs-422)	9 Pin Female D-Sub
I/O Analog Connector	25 Pin Female D-Sub
I/O Probe Connector	9 Pin Female D-Sub
Compliance, Safety	CE, NRTL (US)
Dimensions - (L,W,H)	9.00" x 16.50" x 5.00" (22.86 x 41.9 x 12.7 cm)
Weight	10 lbs., (4.53kg)

Tuning Range, Generic Non-Sputtering Configuration

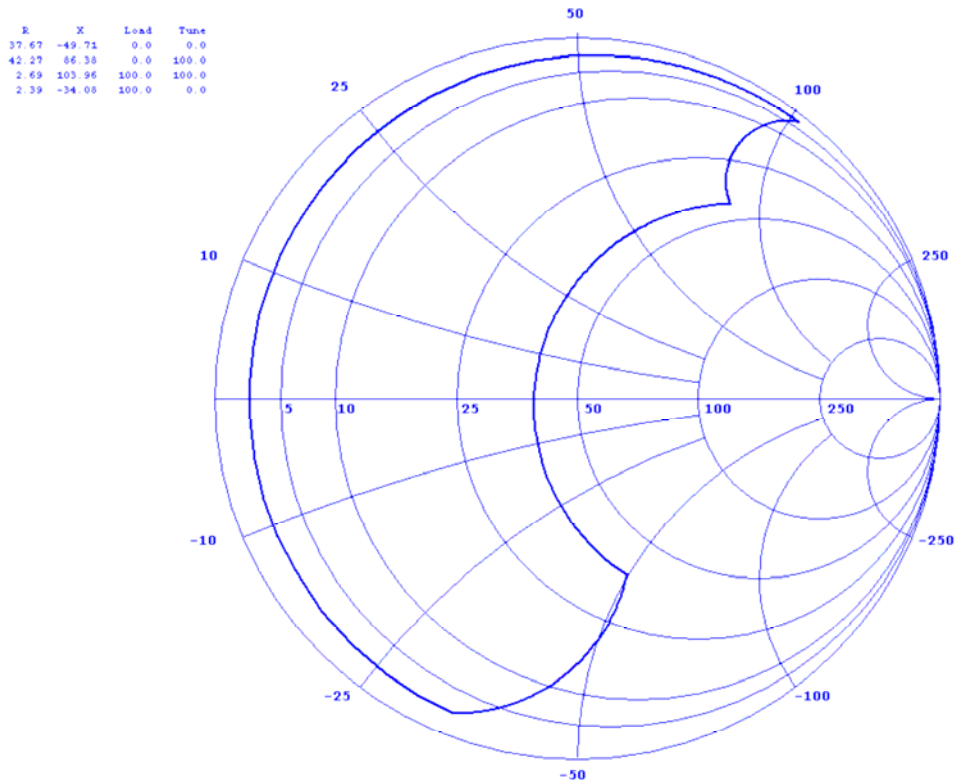

ATS3 Physical Dimensions ( inch [mm] )

